Technical Specifications

|	
Model	AR0230 Camera Module
Pixel	2MP 1928(H)x1088(V)
Sensor	AR0230(1/2.7")CMOS
FOV (Focus Length)	Customizable
Output Format	YUY2 /YUV/JPEG /MJPEG
Frame Rate	1080P:60fps FPS of USB camera is determined by DSP
Application Areas	Notebook/Tablet/Advertising Machine; Smart Home; Visual Intercom; Facial Recognition Drone; Motion Camera; Security Monitoring; Driving Recorder/Police Enforcement Device.
Interface	DVP/MIPI/USB
Size	Customizable

HDF0230-A46(14X14-93°)
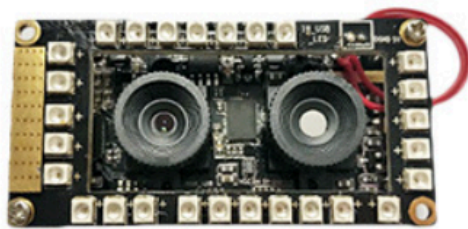L*W:46*14mm(镜头可选配)

AS-AE038A20D12-50x29(DVP双目)
L*W:50*29mm(镜头可选配)

QQSJ-8825-V1.0(USB免驱 带红外灯)

QQSJ-8834(USB双目 大镜头)

QQSJ-8834(USB双目 小镜头)

L*W:60*30mm(镜头可选)

QQSJ-8839(USB双目 双AR0230)

L*W:50*30mm(镜头可选)

QQSJ-8841(USB免驱 带红外灯)

L*W:54*17mm(镜头可选)

QQSJ-8850(USB免驱)

L*W:38*38mm(镜头可选)

QQSJ-8850(USB免驱 带外壳)

L*W:38*38mm(镜头可选)

QQSJ-8860(USB免驱 双目)

L*W:60*30mm(镜头可选)

QQSJ-8872(USB免驱)

L*W:54*18mm(镜头可选)

QQSJ-8882(USB双目 小镜头带灯板)

L*W:80*16mm(镜头可选)

QQSJ-8882(USB双目 大镜头无灯板)

L*W:80*16mm(镜头可选)

QQSJ-8932(USB免驱)

L*W:54*18mm(镜头可选)