

Technical Specifications

Model	OV2710 Camera Module
Pixel	2MP 1920x1080
Sensor	OV2710(1/2.7")CMOS
FOV (Focus Length)	Customizable
Output Format	YUY2 / RaW /MJPEG
Frame Rate	1080p:30fps 720p:60fps VGA: 120 fps OVGA: 240 fps FPS of USB camera is determined by DSP
Application Areas	Notebook/Tablet/Advertising Machine; Smart Home; Visual Intercom; Facial Recognition; Drone; Motion Camera; Security Monitoring; Driving Recorder/Police Enforcement Device.
Interface	DVP/MIPI/USB
Size	Customizable



AS-BA018A72D7-45(DVP)

L:45mm(镜头可选配)



AS-BA018A72M11-20(MIPI)

L:20mm(镜头可选配)



HDF2710-A46-V1.0(MIPI)

L:46mm(镜头可选配)



QQSJ-8808(USB免驱 VGA 120帧)

L*W:38*38mm(镜头可选)



QQSJ-8898(USB免驱 VGA 120帧)

L*W:50*25mm(镜头可选)



QQSJ-8909(USB免驱)

L*W:38*38mm(镜头可选)



QQSJ-8970(USB免驱)

L*W:25*20mm(镜头可选配)



QQSJ-8852(USB双目免驱)

L*W:60*30mm(灯板/镜头可选配)




QQSJ-8860(USB双目免驱)

L*W:60*30mm(灯板/镜头可选配)



QQSJ-8869(USB+MIPI接口)

L*W:62*22mm(镜头可选配)

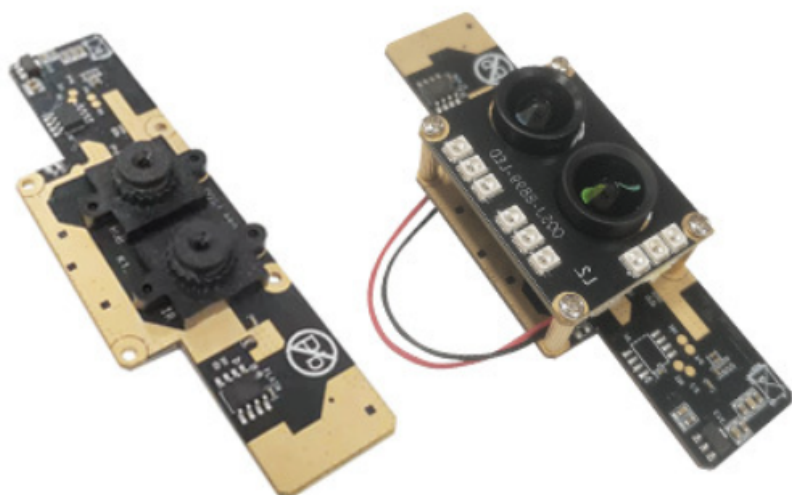

AR0230 OV2710

QQSJ-8899(USB双目)

L*W:88*18mm(PCB)

灯板/镜头可选配